

vera




Vera

Top window for lighting

Large space for cable under the DIN rail.

Stamps on the back

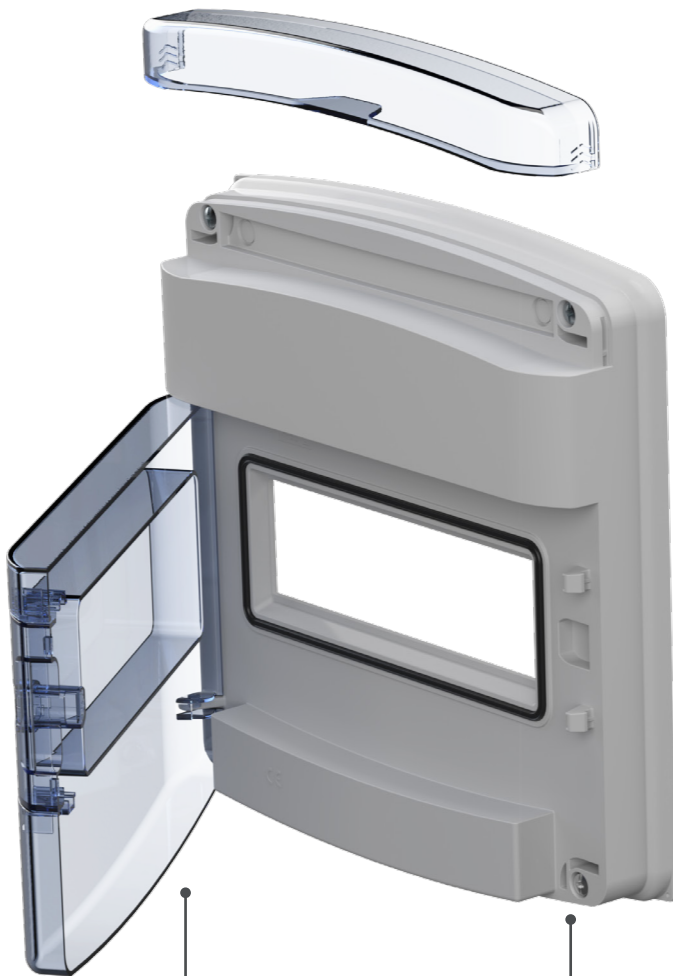

180° side-opening door with manual pressure closure for easy access.

Closed cover with ultra-fast screws.



Sealable

Attach the cover to the box for easy operation.

QUALITY, FUNCTIONALITY AND DESIGN IN A SINGLE SPACE



IP 65



IK08



Clase II



V9

245 x 250 x 139 mm.

Weatherproof distribution box of 9 elements. Grey colour.



V9B

245 x 250 x 110 mm.

Weatherproof distribution box of 9 elements. Grey colour.



V9N

245 x 250 x 139 mm.


Weatherproof distribution box of 9 elements. Black colour.



V9BN

245 x 250 x 110 mm.

Weatherproof distribution box of 9 elements. Black colour.

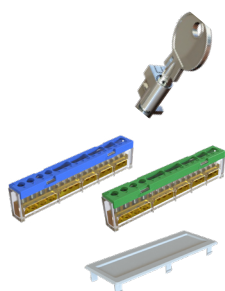


Optional accessories.

CER-MP28	Metal lock.
113PE-1	Earth terminal 13x6 mm ² + 4x16 mm ² . Green.
113N-1	Neutral terminal 13x6 mm ² + 4x16 mm ² . Blue.
TACV9	Lid



*Dimensions: Width x Height x Depth

vera

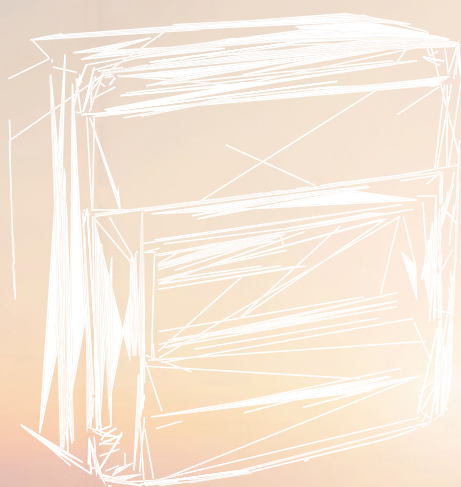

Follow us



Solera SA | International



solera_international



@soleras.a.9271

Portalámparas y Accesorios Solera S.A.U.

C/ Villa de Madrid, 53
46988 Paterna (Valencia) España -Spain
Tel. +34 96 132 23 01
export@psolera.com
www.psolera.com

Solera 