

Angled industrial flush socket 2P+E, 16A 230V~. IP44.

Angled industrial flush socket 2P+E, 16A 230V~. IP44.
Common applications: Industrial environments (factories, warehouses, etc.)



Features

Type	Fitted socket outlet
No. of poles	2P + T
Type of terminal connection	Screw connection
Earth position	6h
Frame for Indubox	MR1316
Nominal current	16A
Nominal voltage	400V
Color	Red

Technical data

Protection Degree (IP)	IP44
Protection Degree (IK)	IK09
Impact shock resistance	Strong
Fire resistance (GWEPT)	850 °C
Heat resistance (Ball pressure)	125 °C
Dimensional stability	-25 °C -> +80 °C
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes

CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60309-1:2001;UNE-EN 60309-2:2001
According to REBT	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

Sustainability



According to European Directive 2011/65/UE (RoHS)	Yes (Complies with UNE EN 50581)
According to European Directive 2012/19/UE (RAEE2)	Yes

Logistics and packaging

Unit EAN code	8423220042902
EAN code container	8423220042902
EAN code packaging	18423220042909
Units packaging	1
Units carton	10
Pallet Units	99999
Packaging Measures cm	29x16,5x19
Unit weight (g)	111
Container Weight (Kg)	0,11
Packaging Weight (Kg)	1,26
Tariff code	85366990

Sketch

Ampere	16		
Pole	3	4	5
a (mm)	70	70	-
b (mm)	85	85	-
c (mm)	50	50	-
d (mm)	65	65	-
e (mm)	38	38	-
f (mm)	47	47	-
g (mm)	51	56	-
h (mm)	61	67	-
i (mm)	5.5	5.5	-
j (mm)	85	96	-
k (mm)	99	104	-

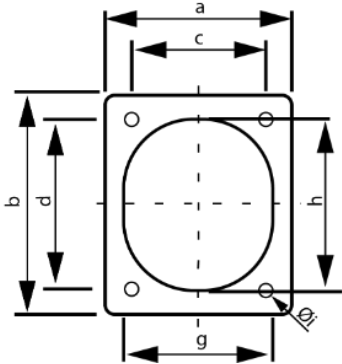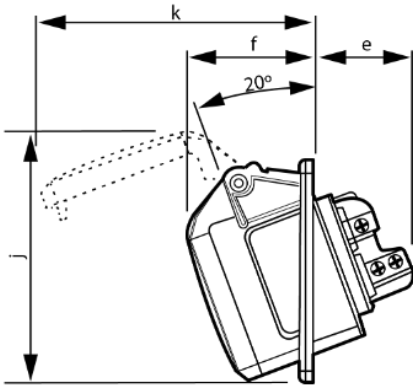

Documentation and downloads



Commercial doc. (0.18MB)