

Industrial plug 3P+E, 125A 400V~. IP67

Industrial plug 3P+E, 125A 400V~. IP67
Common applications: Industrial environments (factories, warehouses, etc.)



Features

With contact pilot	Yes
Type	Straight fitted industrial plug
No. of poles	3P + T
Type of terminal connection	Screw connection
Earth position	6h
Nominal current	125A
Nominal voltage	400V
Color	Red

Technical data

Protection Degree (IP)	IP67
Protection Degree (IK)	IK09
Impact shock resistance	Strong
Fire resistance (GWEPT)	850 °C
Heat resistance (Ball pressure)	125 °C
Dimensional stability	-25 °C -> +80 °C
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes

CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60309-1:2001;UNE-EN 60309-2:2001
According to REBT	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes (Complies with UNE EN 50581)
According to European Directive 2012/19/UE (RAEE2)	Yes

Logistics and packaging

Unit EAN code	8423220064393
EAN code container	8423220064393
EAN code packaging	18423220064390
Units packaging	1
Units carton	2
Pallet Units	99999
Packaging Measures cm	10,2x12x14
Unit weight (g)	943
Container Weight (Kg)	0,94
Packaging Weight (Kg)	2,49
Tariff code	85366990

Sketch

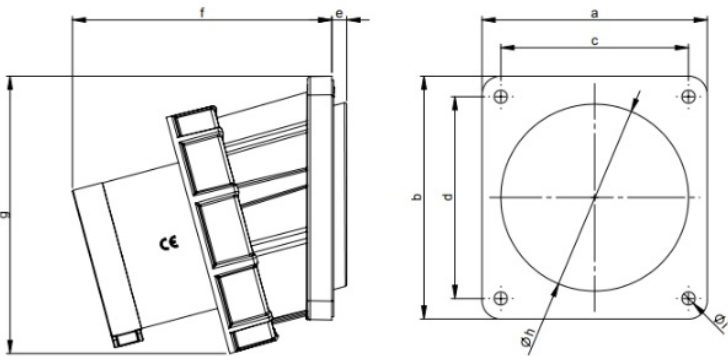

Ampere	125		
Pole	3	4	5
a [mm]	120	120	120
b [mm]	130	130	130
c [mm]	100	100	100
d [mm]	108	108	108
e [mm]	8	8	8
f [mm]	139	139	139
g [mm]	145	145	145
h [mm]	100	100	100
i [mm]	7	7	7



Documentation and downloads



Commercial doc. (0.18MB)