

Mobile industrial plug 2P+E, 32A 230V~. IP44.

Mobile industrial plug 2P+E, 32A 230V~. IP44.
Common applications: Industrial environments (factories, warehouses, etc.)



Features

Type	Mobile industrial plug
No. of poles	2P + T
Type of terminal connection	Screw connection
Earth position	6h
Nominal current	32A
Nominal voltage	230V
Color	Blue

Technical data

Protection Degree (IP)	IP44
Protection Degree (IK)	IK09
Impact shock resistance	Strong
Fire resistance (GWEPT)	850 °C
Heat resistance (Ball pressure)	125 °C
Installation temperature	-25 °C -> +60 °C
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60309-1:2001;UNE-EN 60309-2:2001
According to REBT	Yes

According to European Directive 2014/35 / EU. Low voltage directive	Yes
---	-----


Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes (Complies with UNE EN 50581)
According to European Directive 2012/19/UE (RAEE2)	Yes

Logistics and packaging

Unit EAN code	8423220042629
EAN code container	8423220042629
EAN code packaging	18423220042626
Units packaging	1
Units carton	10
Pallet Units	99999
Packaging Measures cm	28,5x13,5x19
Unit weight (g)	183
Container Weight (Kg)	0,18
Packaging Weight (Kg)	1,96
Tariff code	85366990

Sketch

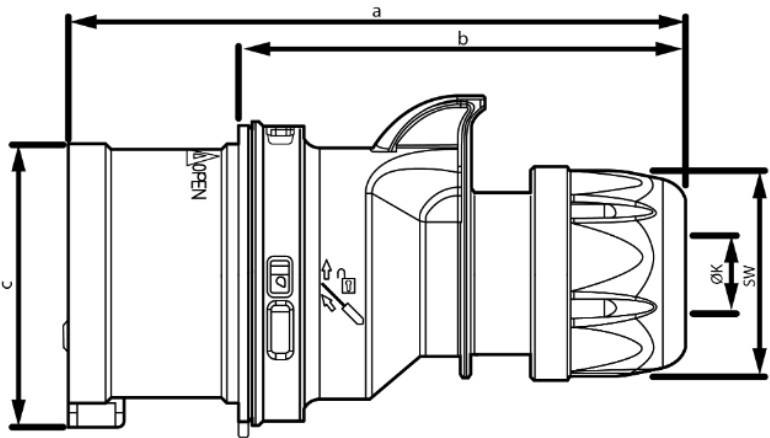

Ampere	16				32			
Pole	3	4	5	7	3	4	5	7
a [mm]	122	128	134	134	150	150	155	155
b [mm]	86	92	98	98	104	104	109	109
c [mm]	47	53	61	61	63	63	70	70
K [mm]	6-15	6-15	8-16	8-16	11,5-20	11,5-20	11,5-22	11,5-22
SW [mm]	42	42	42	42	50	50	50	50

