

Mobile industrial socket 3P+N+E, 32A 400V~. IP44.

Mobile industrial socket 3P+N+E, 32A 400V~. IP44.
Common applications: Industrial environments (factories, warehouses, etc.)



Features

Type	Mobile industrial socket
No. of poles	3P + N + T
Type of terminal connection	Screw connection
Earth position	6h
Nominal current	32A
Nominal voltage	400V
Color	Red

Technical data

Protection Degree (IP)	IP44
Protection Degree (IK)	IK09
Impact shock resistance	Strong
Fire resistance (GWEPT)	850 °C
Heat resistance (Ball pressure)	125 °C
Installation temperature	-25 °C -> +60 °C
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60309-1:2001;UNE-EN 60309-2:2001
According to REBT	Yes

According to European Directive 2014/35 / EU. Low voltage directive	Yes
---	-----


Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes (Complies with UNE EN 50581)
According to European Directive 2012/19/UE (RAEE2)	Yes

Logistics and packaging

Unit EAN code	8423220042834
EAN code container	8423220042834
EAN code packaging	18423220042831
Units packaging	1
Units carton	10
Pallet Units	99999
Packaging Measures cm	29x23x19
Unit weight (g)	273
Container Weight (Kg)	0,27
Packaging Weight (Kg)	2,90
Tariff code	85366990

Sketch

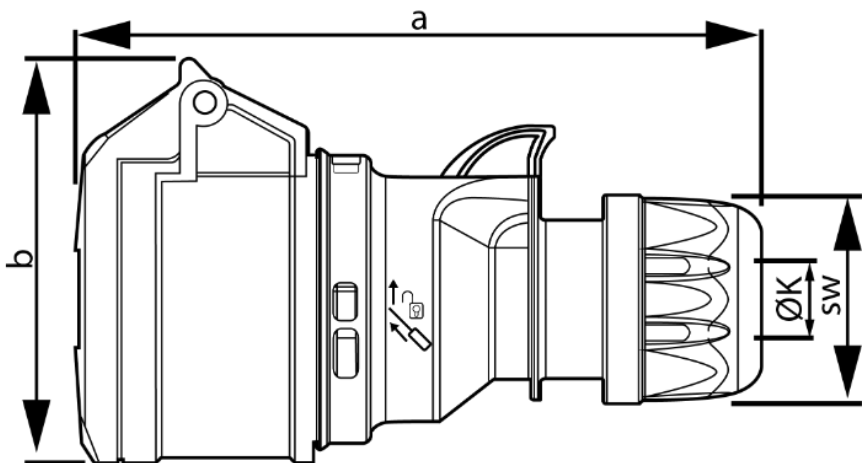

Ampere	16				32			
Pole	3	4	5	7	3	4	5	7
a [mm]	133	138	145	145	161	161	168	168
b [mm]	74	82	89	89	94	94	99	99
K [mm]	6-15	6-15	8-16	8-16	11,5-20	11,5-20	11,5-22	11,5-22
SW [mm]	42	42	42	42	50	50	50	50

