

Industrial surface socket 2P+E, 32A 230V~. IP44

Industrial surface socket 2P+E, 32A 230V~. IP44
Common applications: Industrial environments (factories, warehouses, etc.)



Features

Type	Industrial wall base
No. of poles	2P + T
Type of terminal connection	Screw connection
Earth position	6h
Nominal current	32A
Nominal voltage	230V
Color	Blue

Technical data

Protection Degree (IP)	IP44
Protection Degree (IK)	IK09
Impact shock resistance	Strong
Fire resistance (GWEPT)	850 °C
Heat resistance (Ball pressure)	125 °C
Dimensional stability	-25 °C -> +80 °C
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60309-1:2001;UNE-EN 60309-2:2001

According to REBT	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes (Complies with UNE EN 50581)
According to European Directive 2012/19/UE (RAEE2)	Yes

Logistics and packaging

Unit EAN code	8423220043091
EAN code container	8423220043091
EAN code packaging	18423220043098
Units packaging	1
Units carton	10
Pallet Units	99999
Packaging Measures cm	33x17x26
Unit weight (g)	273
Container Weight (Kg)	0,27
Packaging Weight (Kg)	2,94
Tariff code	85366990

Sketch

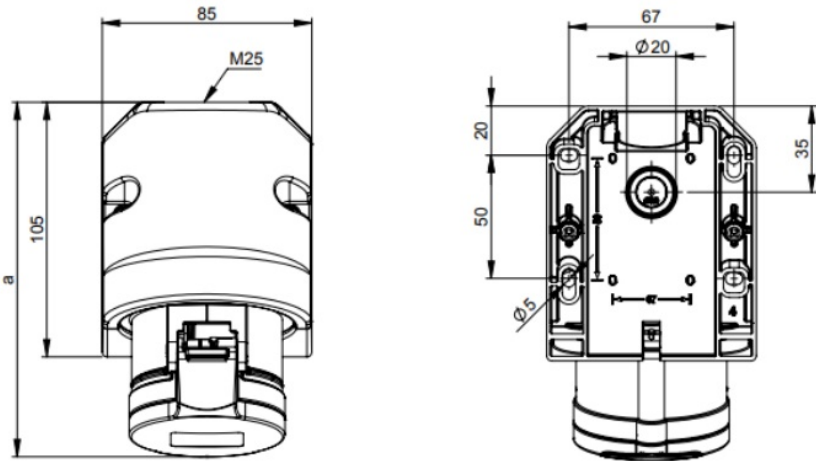

Ampere	16			32		
Pole	3	4	5	3	4	5
a [mm]	142	145	144	155	155	157
b [mm]	97	98	104	106	106	111
M [mm]	25	25	25	25	25	25

