

Flush connection box. 160 x 100 mm. Cover with screws.

Flush connection box. 160 x 100 mm. Cover with screws.Depth 50 mm. 16 inputs for tube Ø 25 mm.
Common applications: Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)



Features

Enclosure type	Connection and derivation
Installation method	Flush in work
Use	Domestic / Tertiary
Location type	Inside
Dimensions inside (mm) (Width x Height x Depth)	160x100x50
Case material	Insulation
Case color	Black
Cap color	White
No. of inlets and size (mm)	16x Ø 25
Lid closure system	Metal screw

Technical data

Impact shock resistance	Medium
Insulation class	Class II
Fire resistance (GWEPT)	650 °C
Heat resistance (Ball pressure)	70 °C
Work stress	400 Vca
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1:2022 UNE- EN 60670-22:2007
According to REBT	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).

Logistics and packaging

Unit EAN code	8423220240353
EAN code container	8423220003637
EAN code packaging	18423220003634
Units packaging	5
Units carton	110
Pallet Units	1320
Packaging Measures cm	59,5x64x39,5
Unit weight (g)	167
Container Weight (Kg)	0,18
Packaging Weight (Kg)	20,68
Tariff code	85371098

Sketch

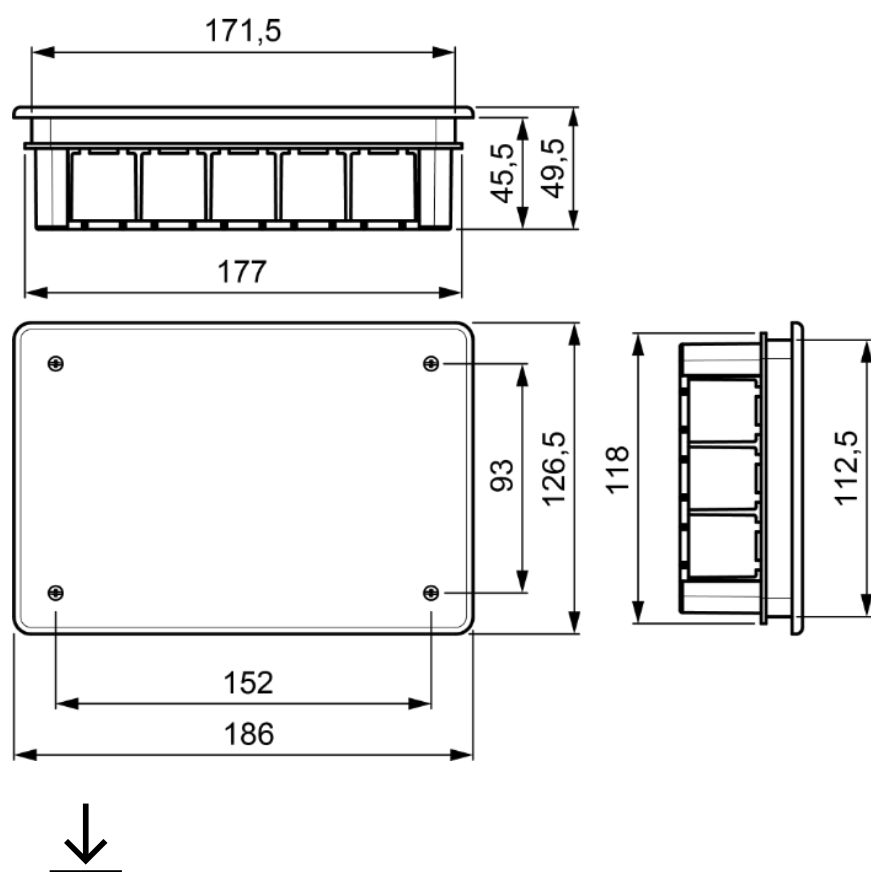

Documentation and downloads



[Assembly instructions \(0.41MB\)](#)