

Hole saw Ø68 countersink (hollow partition wall).

Hole saw Ø68 countersink for hollow wall. Removable countersink plate. High-speed steel alloy body (withstands high temperatures caused by friction). Hardened teeth (the hardening gives rigidity to the steel avoiding wear). Ejector spring and openings to extract the excess. Valid for plaster, gypsum fiber, wood, chipboard, soft metals and plastics.
Common applications: Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)



Features

Installation method	For hollow wall.
Use	Domestic / Tertiary
Location type	Inside
Dimensions gap (mm) (Width x Height x Depth)	Ø 68
Case material	Metallic stainless

Technical data

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 12418:2022

Sustainability


According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
---	--

According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).
According to European Directive 2001/95 / CE. General Product Safety Directive	Yes

Logistics and packaging

Unit EAN code	8423220235878
EAN code container	8423220235878
EAN code packaging	18423220235875
Units packaging	1
Units carton	10
Pallet Units	350
Packaging Measurements cm	16x11x9
Packaging Measures cm	37,5x20x30
Tariff code	39259010

Sketch

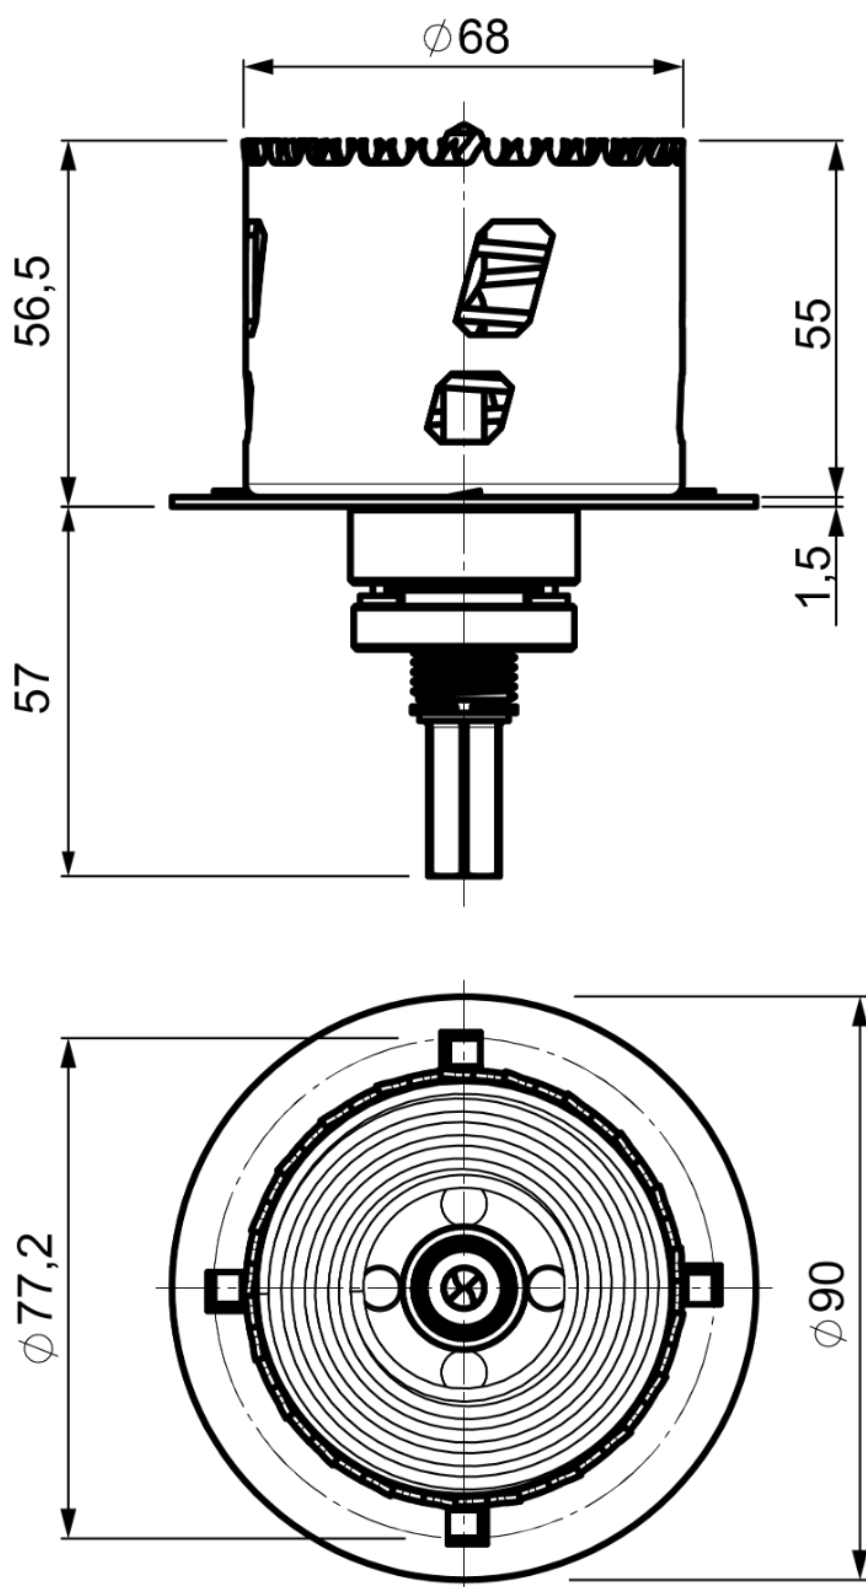

Documentation and downloads



Assembly instructions (3.84MB)



Commercial doc. (3.61MB)



Mechanism boxes for dry wall, Blue range (Solera)



Montaje de las cajas de mecanismos para tabique hueco de la serie blue (Solera)