




Reference

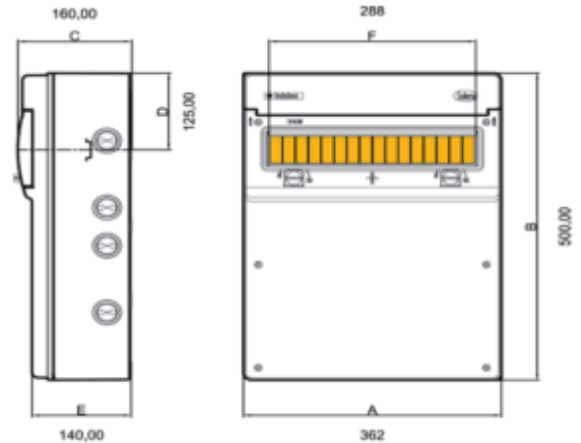

REFERENCE	Nº Mod.	DIMMENSIONS AxBxCxDxExF	VOLUME (M3)	NET WEIGHT (Kg)	Nº Inputs			
					Up/Down.			Lat
					Ø20	Ø25	Ø40	Ø40
1316P-I220	16	362x500x160x125x140x288	0,025	5	2/2	2/2	3/3	4/4

NORMS

- Directive 2006/95/CE
- Directive 2002/95/CE (RoHS)
- Norm EN 60 439

TECHNICAL INFORMATION

Specifications

- Protection IP65–IK08- Class II
- Fire Resistance (Glow Wire Temperature 650°C)
- 2011/65UE (RoHS)
- Dimensional Stability [-25°C;+85]°C
- RAL 7035
- Halogen Free
- UV resistant

Components

- Sealed Industrial Distribution Box IP 65 IK 08 (16 Modules)
- 4 x Frame with French SCHUCKO 2P+T, 16A, 250V~, IP54, wired
- Frame with 3P+N+T, 32A, 400V~, IP44, wired
- Magnetic Breaker 4P, 32A
- 4 x Magnetic Breaker 1P+N, 16A
- Magnetic Circuit Breaker
- Residual Circuit Breaker 4P, 63A, 30mA
- Emergency Stop Button
- Closure System: Standard plastic
- Blind Cover
- Green earth terminal connection bar

