


Reference

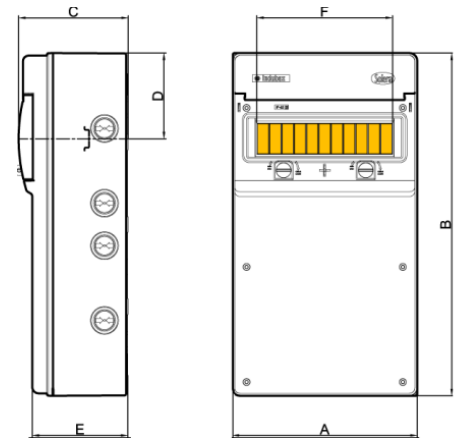

REFERENCE	Nº Mod	DIMMENSIONS AxBxCxDxExF	VOLUME (M3)	NET WEIGHT (Kg)	Nº INPUTS			
					Up/Down			Lat
					Ø20	Ø25	Ø40	Ø40
1311P-I54-2	11	270x500x160x125x140x198	0,024	3.8	2/2	2/2	3/3	4/4

NORMS

- Directive 2006/95/CE
- Directive 2002/95/CE (RoHS)
- Norm EN 60 439

TECHNICAL INFORMATION

Spécification

- Sealed Industrial Distribution Box IP 65 IK 08
- Ingress Protection: IP44
- Complies with RoHS directives.
- Fire Resistance (GWT 650°C)
- Dimensional Stability (-5°C;+85°C)
- RAL 7035
- Halogen Free
- UV Resistant

Components

- 3 sockets IP54, NF 2P+E, 16A, 250V~ wired
- 1 socket IP44 3P+N+E, 32A, 400V~ wired
- 1 MCB x 2P, 16A, 2 Modules. Curve C.
- 1 MCB x 4P, 32A. Curve C.
- 1 MCB x 4P, 40A, 30mA. 6KA. Type AC
- 1 x M32 Cable gland
- 1 Earth Terminal (2x16mm² +12x6mm²)
- 1 Emergency Stop Button
- 1 LED light
- 1 Shunt trip

Supplied

1 Metallic Support (0,80m height)
1 Electric Scheme
1 Technical Sheet

