


### Description & characteristics

- Manual control switches for general use.
- For surface fitting, and indoor or outdoor installation.
- Rated Voltage: 250V
- Rated Current: 10A
- Thermoplastic material.
- Screw terminals.
- M16 Entry tube.
- Flexible membrane.
- 50Hz Frequency.
- Grey color.



### Dimensions

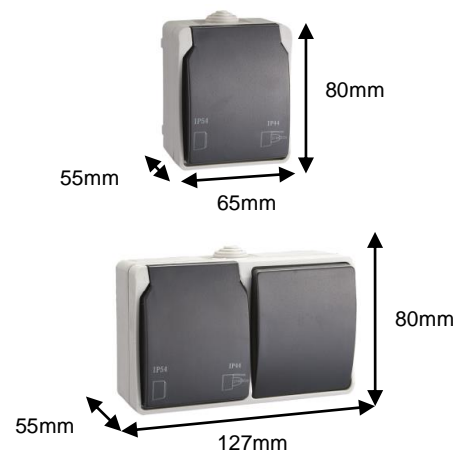

Ref. 3303 / Switch 10A 250V  
Ref. 3320 / Button



Ref. 3313  
Double Switch



Ref. 3320IL  
Light Button



Ref. 3360 / 2P+E 16A 250V  
Ref. 3360F / 2P+T 16A 250V



Ref. 3363 / 2P+E + Switch 16A 250V  
Ref. 3363F / 2P+T + Switch 16A 250V



Ref. 3366 / Double 2P+E 16A 250V  
Ref. 3366F / Double 2P+T 16A 250V

### Specifications

- Norm EN 60669-1
- IEC 884-1.
- Directive 2014/35/UE

- Norm UNE 60669-1

### Technical data

- Ingress protection IP54
- Fire Resistance 650°C & 850°C (Glow Wire Temperature)
- Heat Resistance 70°C and 125°C (Ball Pressure Test)
- Halogen Free material
- Silver Contacts

