

Flush connection box. 362 x 526 x 86 mm.

Flush connection box. Door with heat dissipation grid. Dimensions 362 x 526 x 86 mm.

Common applications: Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)



Features

Enclosure type	Connection and derivation
Installation method	Flush in work
Use	Domestic / Tertiary
Location type	Inside
Dimensions outside (mm) (width x height x depth)	362x526x86
Case material	Insulation
Frame and door material	Insulation
Case color	Black
Door color	White with heat dissipation grid.
Door opening	Horizontal
Battens included	No
Lid closure system	Ultra-fast metal screw
Door closing system	A Pressure
Reversible door	Yes
Possibility of mounting strips	Yes (not included)
Possibility of putting lock	Key
Possibility of mounting plate	Yes (not included)
Possibility of mounting DIN rail	Yes (not included)
Possibility of mounting .PL-MP28 plate	Yes (not included)

Technical data

Protection Degree (IP)	IP40
Protection Degree (IK)	IK08
Impact shock resistance	Medium
Insulation class	Class II
Fire resistance (GWEPT)	650 °C
Heat resistance (Ball pressure)	70 °C
Installation temperature	-5 °C -> +60 °C
Ambient operating temperature	-5 °C ; +40 °C
Work stress	400 Vca
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-22:2007 UNE-EN 62208:2012
According to REBT	Yes
APPlus certificate	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes



Sustainability

According to European Directive 2011/65/UE (RoHS)	The Directive 2011/65/EU (RoHS II) is not applicable as it does not correspond to the definition of Electrical and Electronical Equipment (EEE) as per article 3.1
According to European Directive 2012/19/UE (RAEE2)	Not applicable because it does not meet the definition of Electrical and Electronic Equipment (EEE) as described in Article 3.1(a) of Directive 2012/19/EU (WEEE II).
According to European Directive 2001/95 / CE. General Product Safety Directive	Yes

Logistics and packaging

Unit EAN code	8423220256941
EAN code container	8423220256941
Units packaging	1
Units carton	4
Pallet Units	60
Tariff code	85371098

Sketch

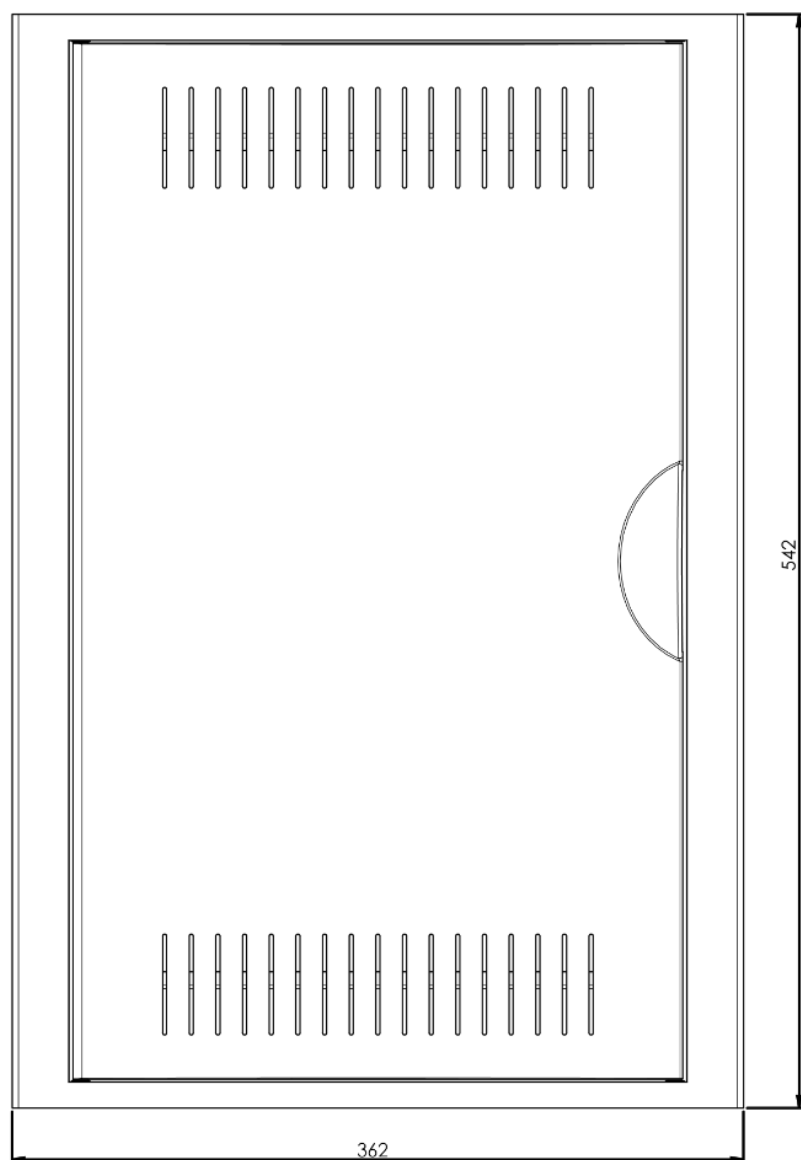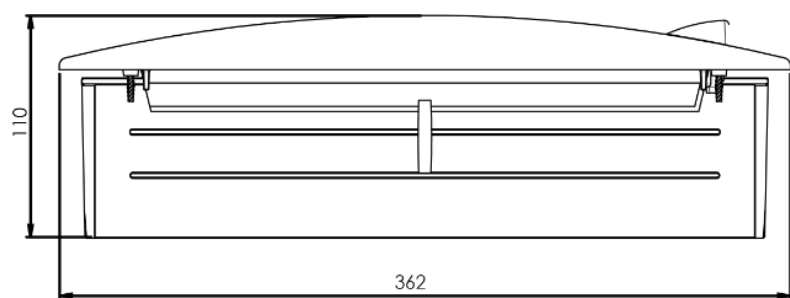

Documentation and downloads



Assembly instructions (0.87MB)



Series replenishments (0.07MB)